



Danger Den NV-98GX2 Waterblock Installation

Danger Den LLC assumes no liability whatsoever, expressed or implied, for the use or installation of this product. These installation instructions are subject to change without notice.

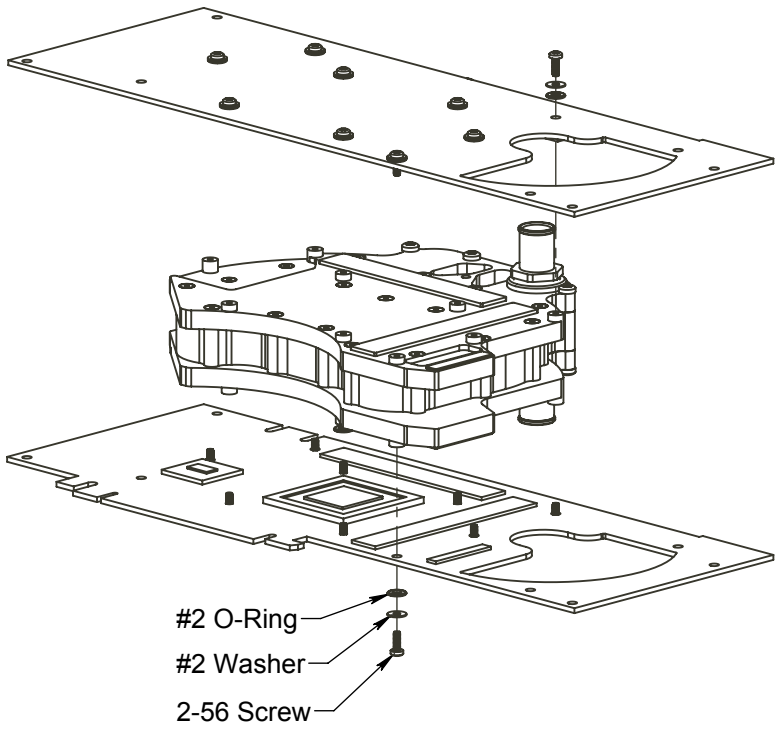

(Verify that SLi bridges are installed after block mouting)

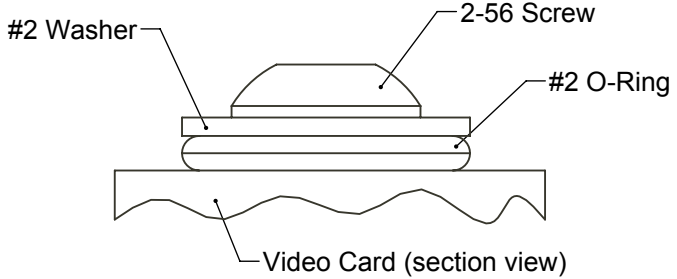

Tighten screws until O-Ring diameter is equal to or slightly greater than the diameter of the washer.

Caution:
Do Not overtighten screws. Installing the screws too tight may cause video card to bend. If video card show signs of bending, loosen screws slightly and recheck videocard for bending.

Items included in kit:

| Discription | QTY |
|----------------|-----------|
| 2-56 Screw | 18 |
| #2 SS Washer | 18 |
| #2 O-Ring | 18 |
| Thermal Grease | 2 tube |
| Thermal Pad | 1 (2"x2") |
| NV-98GX2 Block | 1 |

